


- Machine Taps
- Maschinen-Gewindebohrer
- Machinetappen
- Tarauds machine
- Machos de máquina
- Macho de Máquina

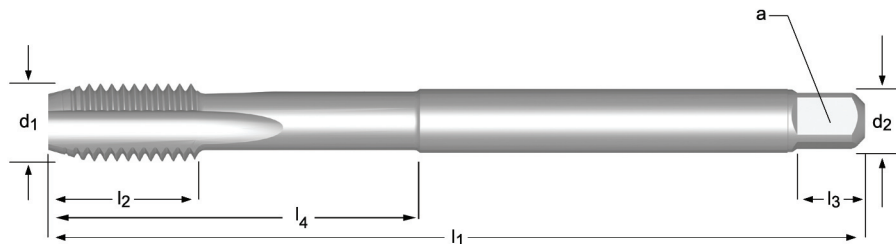

E600


M HSCo ISO 2283 6H 1,5xD

1.1 1.2 1.3 1.4 1.5 3.1 3.2 3.3 3.4 6.1 6.2 6.3 6.4 7.2 7.3 7.4 8.2 8.3

M	P mm	l ₁ mm	l ₂ mm	d ₂ Ø mm	□ a mm	l ₃ mm	z	↔	l ₄ mm	e-Code
3	0,50	66	11	3,15	2,50	5	3	2.5	22	E600M3NO1
3	0,50	66	11	3,15	2,50	5	3	2.5	22	E600M3NO2
3	0,50	66	11	3,15	2,50	5	3	2.5	22	E600M3NO3
3.5	0,60	68	13	3,55	2,80	5	3	2.9	25	E600M3.5NO1
3.5	0,60	68	13	3,55	2,80	5	3	2.9	25	E600M3.5NO2
3.5	0,60	68	13	3,55	2,80	5	3	2.9	25	E600M3.5NO3
4	0,70	73	13	3,15	2,50	5	3	3.3		E600M4NO1
4	0,70	73	13	3,15	2,50	5	3	3.3		E600M4NO2
4	0,70	73	13	3,15	2,50	5	3	3.3		E600M4NO3
5	0,80	79	16	4,00	3,15	6	3	4.2		E600M5NO1
5	0,80	79	16	4,00	3,15	6	3	4.2		E600M5NO2
5	0,80	79	16	4,00	3,15	6	3	4.2		E600M5NO3
6	1,00	89	19	4,50	3,55	6	3	5		E600M6NO1
6	1,00	89	19	4,50	3,55	6	3	5		E600M6NO2
6	1,00	89	19	4,50	3,55	6	3	5		E600M6NO3
7	1,00	89	19	5,60	4,50	7	3	6		E600M7NO1
7	1,00	89	19	5,60	4,50	7	3	6		E600M7NO2
7	1,00	89	19	5,60	4,50	7	3	6		E600M7NO3
8	1,25	97	22	6,30	5,00	8	3	6.8		E600M8NO1
8	1,25	97	22	6,30	5,00	8	3	6.8		E600M8NO2
8	1,25	97	22	6,30	5,00	8	3	6.8		E600M8NO3
10	1,50	108	24	8,00	6,30	9	3	8.5		E600M10NO1
10	1,50	108	24	8,00	6,30	9	3	8.5		E600M10NO2
10	1,50	108	24	8,00	6,30	9	3	8.5		E600M10NO3
12	1,75	119	29	9,00	7,10	10	3	10.3		E600M12NO1
12	1,75	119	29	9,00	7,10	10	3	10.3		E600M12NO2
12	1,75	119	29	9,00	7,10	10	3	10.3		E600M12NO3
14	2,00	127	30	11,2	9,00	12	4	12		E600M14NO1
14	2,00	127	30	11,2	9,00	12	4	12		E600M14NO2
14	2,00	127	30	11,2	9,00	12	4	12		E600M14NO3
16	2,00	137	32	12,5	10,0	13	4	14		E600M16NO1
16	2,00	137	32	12,5	10,0	13	4	14		E600M16NO2
16	2,00	137	32	12,5	10,0	13	4	14		E600M16NO3
18	2,50	149	37	14,0	11,2	14	4	15.5		E600M18NO1
18	2,50	149	37	14,0	11,2	14	4	15.5		E600M18NO2
18	2,50	149	37	14,0	11,2	14	4	15.5		E600M18NO3
20	2,50	149	37	14,0	11,2	14	4	17.5		E600M20NO1
20	2,50	149	37	14,0	11,2	14	4	17.5		E600M20NO2
20	2,50	149	37	14,0	11,2	14	4	17.5		E600M20NO3
22	2,50	158	38	16,0	12,5	16	4	19.5		E600M22NO1
22	2,50	158	38	16,0	12,5	16	4	19.5		E600M22NO2

E600

DORMER

M	P mm	l ₁ mm	l ₂ mm	d ₂ ∅ mm	□ a mm	l ₃ mm	z		l ₄ mm	e-Code
22	2,50	158	38	16,0	12,5	16	4	19.5		E600M22NO3
24	3,00	172	45	18,0	14,0	18	4	21		E600M24NO1
24	3,00	172	45	18,0	14,0	18	4	21		E600M24NO2
24	3,00	172	45	18,0	14,0	18	4	21		E600M24NO3
27	3,00	180	45	20,0	16,0	20	4	24		E600M27NO1
27	3,00	180	45	20,0	16,0	20	4	24		E600M27NO2
27	3,00	180	45	20,0	16,0	20	4	24		E600M27NO3
30	3,50	183	48	20,0	16,0	20	4	26.5		E600M30NO1
30	3,50	183	48	20,0	16,0	20	4	26.5		E600M30NO2
30	3,50	183	48	20,0	16,0	20	4	26.5		E600M30NO3